




TYPE _____

CATALOG# _____

LG-100-LED

Thermoplastic Emergency Light
with two LED heads

NOBLER SERIES™

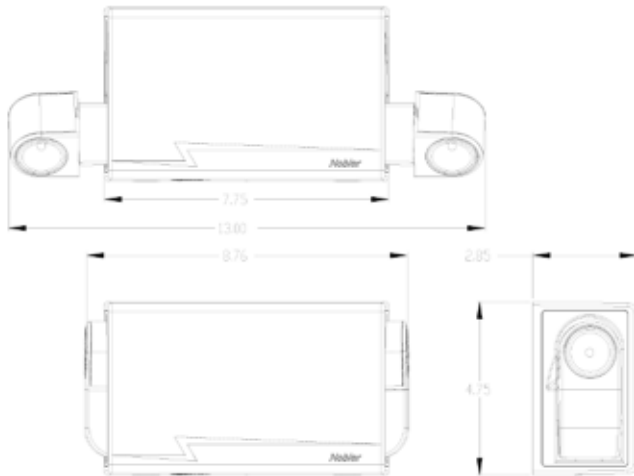

GENERAL DESCRIPTION

The Nobler Series emergency lights combine efficiency and sophistication to illuminate paths of egress. This fully-adjustable Life Safety product is designed to provide the highest level of glare-free illumination while blending into any environment.

HOUSING

UV Stable Thermoplastic flame retardant meets UL standard 95-VA. This unit is available in white, black, and titanium. Mounting plate can be installed at rough-in while main unit can be simply snapped into place after final touch ups have taken place.

ILLUMINATION

Mounted in precision-formed, fully adjustable assemblies. Fixture illuminated by two 1W LED lamps.

ELECTRONICS & BATTERY

Standard Transformer Input is dual voltage 120/277 60Hz. Solid State charging system features Low Voltage Disconnect (LVD), AC lockout installation, brown out protection, and standard AC indicator LED light. With an average life of 5 years, the maintenance-free sealed lead calcium Battery provides a minimum of 90 minutes of illumination in emergency mode. Optional Nickel Cadmium battery also available.

CODE COMPLIANCE

Meets or exceeds UL 924, NFPA, NEC, and OSHA standards.

WARRANTY

5 year pro rated warranty on sealed lead acid battery

LG-100-LED

Model

Housing Color

Factory Installed Options

W = White
B = Black
TI* = Titanium
SP = Custom Finish

NC = NiCd Battery
220 = 220VAC Input
SD = Self Diagnostics

