



**Specifier's Reference**

Project
Type
Model No.
Comments

**codes and standards**

- UL listed to Standard 924
- UL damp location listing option 32°F (0°C) to 104°F (40°C)
- IBC, BOCA, and OSHA illumination standard
- NFPA 101 (Life Safety Code)
- NFPA 70 (National Electric Code)
- City of Chicago approved (CHY heads only)
- New York City approved

**construction**

- Enclosure is constructed of 20 gauge steel (25-50 W) or 18 gauge steel (75-100 W) with a 20 gauge cover and a white corrosion resistant, epoxy powder coat finish.
- Nine standard and custom colors available, consult factory.

**installation**

- Easily mounted with key hole slots or optional mounting plates.
- All housings have six available 1/2" conduit knockouts.

**electronics**

- 120/277 VAC dual voltage input with surge protection is standard on all models.
- All models feature the Intelli-Charge circuit where the charging system is microprocessor driven with software embedded diagnostic routine and temperature compensation.
- All models include brownout detection, AC lockout, low voltage disconnect, AC power indicator, charge status indicator, audible user-interface controls, visual LED system fault indicator, and tactile push-to-test switch.
- Additional equipment safety features include reverse battery polarity detection and protection, and reverse utility power detection and protection.
- All models include an on-board IR receiver for use with the optional hand-held remote (ICIR).

- (optional) self-testing electronics

The diagnostic/charging platform with optional self-testing mode automatically runs a one minute self-test every 30 days and a 30 minute test on the sixth and twelfth month in accordance with NFPA 101.

A one minute or 90 minute test may be initiated via the push to test switch on the unit or by activating the appropriate test command on the optional IR test device.

- operating temperature range  
Standard Location: 65°F (19°C) to 85°F (30°C).  
Damp Location: 32°F (0°C) to 104°F (40°C).
- power consumption  
6 V lead calcium, 25-100 W units - 0.125 A (120 VAC), 0.060 A (277 VAC)  
6 V NiCad, 25-50 W units - 0.159 A (120 VAC), 0.065 A (277 VAC)  
6 V NiCad, 75 W units - 0.223 A (120 VAC), 0.094 A (277 VAC)

**lamps**

- Illumination is accomplished with two PAR 36 lamp heads mounted on the top or side of the enclosure.
- 75-100 W units can accommodate up to three lamp heads mounted directly to the top, side or bottom of the housing.

**battery**

- Maintenance free sealed lead calcium battery with 5 year life.
- Maintenance free sealed nickel cadmium battery with 10 year life.
- Provides a minimum of 90 minutes emergency illumination.

**warranty**

- Five full year warranty on electronics and unit (excluding lamps).

**Green Product Choice: CMF25F2IC**

Series/Battery		Lamp Heads*	# of Heads	Model Designator	Options
6 V, Lead Calcium	6 V, Nickel Cadmium	(Metal Chrome PAR 36)	Blank – No Heads	IC – Intelli-Charge Diagnostics	A – Ammeter
CMF25 – 25 W	CNM25 – 25 W	6 VDC Tungsten	1 – One		BD – Battery Disconnect Switch
CMF36 – 36 W	CNM50 – 50 W	Y – 8 W	2 – Two		BM – Lamp Heads Installed on Bottom of Enclosure <sup>2</sup>
CMF50 – 50 W	CNM75 – 75 W	A – 18 W	3 – Three <sup>4</sup>		DL – UL Damp Location Listed (0°C to 40°C)
CMF75 – 75 W		L – 25 W			EX – Special Input Transformer (specify voltage & frequency) <sup>1</sup>
CMF100 – 100 W		C – 30 W			F1 – 120 VAC Input Fuse
					F2 – 277 VAC Input Fuse
		6 VDC Halogen			P1 – 120 VAC Power Switch
		F – 6 W			P2 – 277 VAC Power Switch
		Q – 8 W			SM – Lamp Heads Installed on Side of Enclosure <sup>3</sup>
		CHY – 12 W			SP – Special Paint, Specify Color
					T – Self-Testing Diagnostics
					TA – Audible Self-Testing Diagnostics
					TD – Time Delay, 15 Minutes
					V – Voltmeter

\*Optional lamp heads available, consult factory or refer to lamp heads page.

**Accessories (Order Separately)**

- ICIR – Intelli-Charge Infra-Red Remote
- SSMP – Mounting Plate (25-50 W)
- SMMP – Mounting Plate (75-100 W)
- SKIT – Strapping Kit For Use With Mounting Plates To Affix To Columns, Poles and I-beams
- WG5 – Wire Guard (25-100 W)


**Footnotes**

- <sup>1</sup> Some option combinations may impact UL listing. Consult factory for specifics.
- <sup>2</sup> Bottom mounted lamp heads (BM) available on 75-100 W units only.
- <sup>3</sup> Side mounted lamp heads (SM) are not installed onto the enclosure at the factory.
- <sup>4</sup> 75-100 W units only.

options

- A – The ammeter option includes an analog meter electrically connected to the charging circuit for visual reference and indication of the current level being delivered to the battery.
- BD – The battery disconnect switch allows for the electrical switching between the battery and the connected load (lamp heads) whether they be directly mounted to the equipment or installed as remote lamp heads. The switch will be located internally to the equipment and is not made accessible other than to those who perform maintenance on the equipment.
- DL – Damp location listed products include various levels of corrosion protection on printed circuit board assemblies and other metallic parts. Environmental testing throughout a range of ambient temperature and 88% relative humidity.
- EX – The special input transformer option allows for input voltage and frequencies beyond the standard 120/277 VAC, 60 Hz input.
- F1 – The AC fuse option includes an in-line fuse on the primary winding of the input transformer for additional electronic protection against utility surges or spikes limited to 120VAC circuits.
- F2 – The AC fuse option includes an in-line fuse on the primary winding of the input transformer for additional electronic protection against utility surges or spikes limited to 277 VAC circuits.
- P1 – The AC power switch option includes a toggle switch electrically connected to the primary of the input transformer limited to 120VAC circuits. This option allows for opening the utility feed to the equipment for servicing or maintenance.
- P2 – The AC power switch option includes a toggle switch electrically connected to the primary of the input transformer limited to 277 VAC circuits. This option allows for opening the utility feed to the equipment for servicing or maintenance.
- T – The self-testing option enables a periodic self-test of the equipment where a test routine is established to perform a one-minute test every thirty days with a 30-minute test performed on the sixth and twelfth month in accordance with NFPA 101. Equipment readiness faults are indicated with a visual LED display.
- TA – The audible self-testing option enables a periodic self-test of the equipment where a test routine is established to perform a one-minute test every thirty days with a 30-minute test performed on the sixth and twelfth month in accordance with NFPA 101. Equipment readiness faults are indicated with a visual LED display and an audible alarm.
- TD – The time delay circuit causes the emergency lighting equipment to remain under battery power for a period of 15 minutes after the utility power has been restored.
- V – The voltmeter option includes an analog meter electrically connected between the battery and lamp load for visual reference and indication of the battery terminal voltage when the equipment is operating in the emergency mode.


dimensions

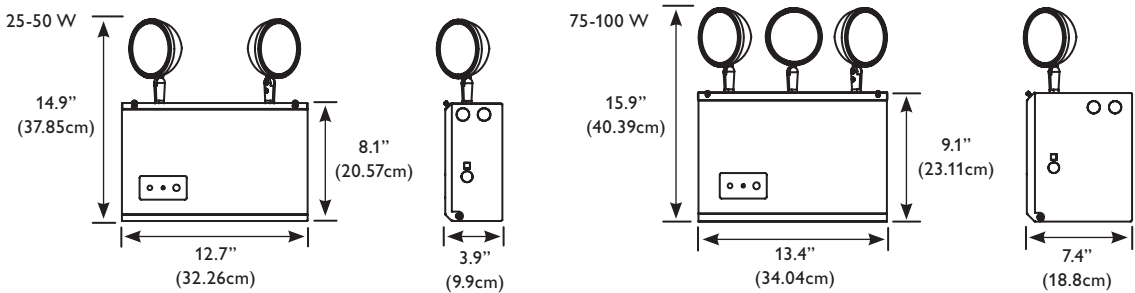

performance

Meets Life Safety Code illumination standard; average of 1.0 FC, no point less than 0.1 FC, max to min ratio of 40:1. Assumes open space with no obstructions, mounting height: 7.5' and reflectances: 80/50/20. Analysis based on independently tested photometrics.

Wall mounted 7.5' AFF, 6 V 12 W PAR 36 Halogen Lamps  
1 FC Average

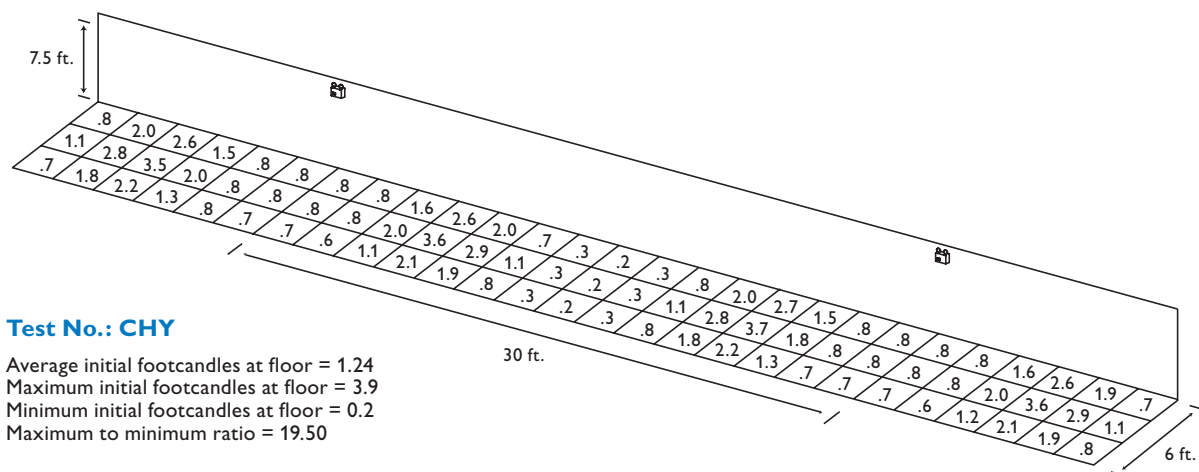

Test No.: CHY

Average initial footcandles at floor = 1.24  
Maximum initial footcandles at floor = 3.9  
Minimum initial footcandles at floor = 0.2  
Maximum to minimum ratio = 19.50



© 2013 Koninklijke Philips Electronics N.V. All rights reserved. Specifications are subject to change without notice.

CH-40150 03/13

Philips Lighting Company  
200 Franklin Square Drive  
Somerset, NJ 08873  
Phone: 855-486-2216

www.philips.com/luminaires

Philips Lighting Company  
281 Hillmount Road  
Markham ON, Canada L6C 2S3  
Phone: 800-668-9008

www.philips.com/luminaires