



E-STAR Series

CONTRACTOR GRADE STEEL LED EXIT



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____

PRODUCT DESCRIPTION

E-Star Series Steel LED Exit Signs offer long lamp life, energy efficiency and uniform illumination in a sleek yet rugged design. Possessing premium installation features such as a simple screw-on canopy, along with knockout chevron directional indicators, the E-Star Series is ideal for applications that require the durability of metal construction in an economical package. All E-Star Series signs include a second faceplate and canopy for universal installation.

PRODUCT SPECIFICATIONS

CONSTRUCTION

Rugged, heavy duty 20-gauge die-formed steel construction • Universal mounting pattern knockouts in backplate for back mounting • Second faceplate included for double face applications • 6" letters with 3/4" stroke width • Chevron directional indicator knockouts • Red or green letters • Corrosion-resistant polyester powder coat paint • White or black finish.

ELECTRICAL

Dual voltage 120/277VAC • Rated for use in damp locations • Solid state charging and switching • Brownout protection • Battery low voltage disconnect • Overload and short circuit protection • AC power indicator and test switch.

LAMPS

Long life, energy saving LED lamps • Red or green LED/letters • Signs consume less than 4 watts.

BATTERY


Long life, maintenance-free, high performance nickel cadmium • Designed to operate over a wider range of temperature conditions (32°F-100°F recommended operating range) • Battery will operate sign for a minimum of 90 minutes in the event of a power outage.

CODE COMPLIANCE

UL924 • Damp location rated • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant • CEC Title 20 Compliant

WARRANTY

5-year warranty. Product specifications subject to change without notice.

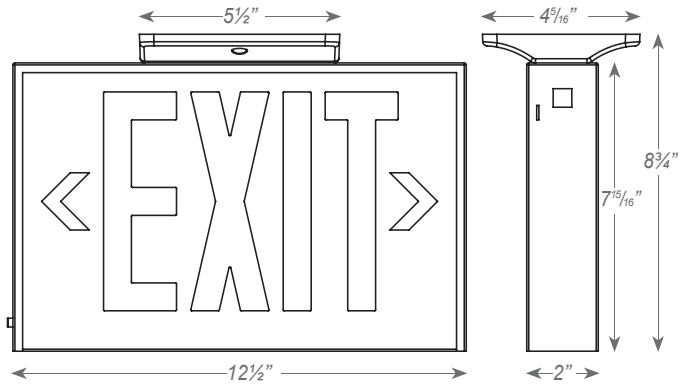

INSTALLATION

MOUNTING

May be top, end or back mounted • All signs include canopy and mounting hardware for easy top or end mount installation • Backplate includes universal mounting pattern knock-outs for simple back mounting.



ORDERING INFORMATION

model	# of faces	color code	options	accessories ³
SX = AC Only	1/2C = Universal ¹	WWR = Red Letters/White Housing	SD ² = Self-Diagnostics	WG1 = Wire Guard (Wall Mount)
PSX = Battery Backup		WWG = Green Letters/White Housing	SL = Special Lettering	BPG2= Wire Guard (Wall Mount) Powdercoat White Finish
		BBR = Red Letters/Black Housing		BPG3 = Wire Guard (Ceiling Mount) Powdercoat White Finish
		BBG = Green Letters/Black Housing		PCS-1 = Polycarbonate Cover 2 1/2" x 9-3/16" x 13-3/16"
				BG-1 = Vandal Resistant Bubble Shield 7 3/4" x 22" x 15"
				PKSX1 = Pendant Kit - 12"

Notes

¹ Universal includes 2nd exit face, backplate and canopy

² Not available on AC units

³ Order as separate line item. Field installation

Ordering Example: PSX-1/2C-WWR