


# SERIES AM



## Fluorescent Power Packs with Sealed Nickel Cadmium Battery

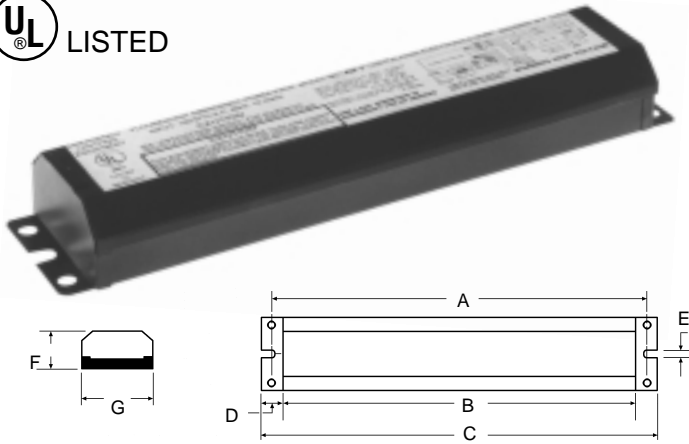

Model No.	DIMENSIONS						
	A	B	C	D	E	F	G
AM6	9"	8 <sup>3</sup> / <sub>8</sub> "	9 <sup>5</sup> / <sub>8</sub> "	9 <sup>9</sup> / <sub>16</sub> "	5 <sup>1</sup> / <sub>16</sub> "	1 <sup>1</sup> / <sub>2</sub> "	2 <sup>3</sup> / <sub>8</sub> "
AM7	9"	8 <sup>3</sup> / <sub>8</sub> "	9 <sup>5</sup> / <sub>8</sub> "	9 <sup>9</sup> / <sub>16</sub> "	5 <sup>1</sup> / <sub>16</sub> "	1 <sup>1</sup> / <sub>2</sub> "	2 <sup>3</sup> / <sub>8</sub> "
AM9	8 <sup>7</sup> / <sub>8</sub> "	8 <sup>1</sup> / <sub>4</sub> "	9 <sup>3</sup> / <sub>8</sub> "	5 <sup>5</sup> / <sub>8</sub> "	1 <sup>1</sup> / <sub>4</sub> "	1 <sup>1</sup> / <sub>2</sub> "	2 <sup>3</sup> / <sub>8</sub> "
AM10	14 <sup>1</sup> / <sub>16</sub> "	13 <sup>7</sup> / <sub>16</sub> "	14 <sup>5</sup> / <sub>8</sub> "	9 <sup>9</sup> / <sub>16</sub> "	5 <sup>1</sup> / <sub>16</sub> "	1 <sup>1</sup> / <sub>2</sub> "	2 <sup>3</sup> / <sub>4</sub> "
AM11	8 <sup>7</sup> / <sub>8</sub> "	8 <sup>3</sup> / <sub>8</sub> "	9 <sup>1</sup> / <sub>2</sub> "	9 <sup>9</sup> / <sub>16</sub> "	5 <sup>1</sup> / <sub>16</sub> "	1 <sup>1</sup> / <sub>2</sub> "	2 <sup>3</sup> / <sub>8</sub> "
AM12	12 <sup>1</sup> / <sub>4</sub> "	11 <sup>13</sup> / <sub>16</sub> "	13 <sup>1</sup> / <sub>8</sub> "	5 <sup>5</sup> / <sub>8</sub> "	1 <sup>1</sup> / <sub>4</sub> "	1 <sup>1</sup> / <sub>2</sub> "	2 <sup>1</sup> / <sub>4</sub> "
AM18	11 <sup>1</sup> / <sub>2</sub> "	10 <sup>7</sup> / <sub>8</sub> "	12"	9 <sup>9</sup> / <sub>16</sub> "	1 <sup>1</sup> / <sub>4</sub> "	1 <sup>1</sup> / <sub>2</sub> "	2 <sup>3</sup> / <sub>8</sub> "
AM20	9"	8 <sup>3</sup> / <sub>8</sub> "	9 <sup>1</sup> / <sub>2</sub> "	9 <sup>9</sup> / <sub>16</sub> "	5 <sup>1</sup> / <sub>16</sub> "	1 <sup>1</sup> / <sub>2</sub> "	2 <sup>3</sup> / <sub>8</sub> "

Dimensions are approximate and subject to change.

**application** Designed to convert new or existing fluorescent fixtures into instantaneous emergency lighting. Eliminates the need for conventional emergency lighting units, thereby eliminating dangerous shadows and glare from "spot" fixtures while maintaining the continuity of lighting design and room decor.

### features

- **HOUSING:** Unit components are housed in a compact ballast size case.
- **INSTALLATION:** simple and inexpensive. Unit mounts easily inside or on top of fixture utilizing wire end caps.
  - Can be wired to operate with switched, unswitched or normally off fixtures without affecting normal operation.
  - Can be used with Circline, U-shaped & energy saving lamps. For VHO, SHO and Power Groove® lamps use the AM7, AM10 or AM12.
  - Compatible with standard, energy-saving, dimming & electronic AC ballasts.

- **ELECTRONICS:**
  - Fully automatic solid state charger.
  - Automatic transfer relay energizes lamp instantaneously upon failure of normal AC supply.
  - Low voltage disconnect prevents overdischarge of battery.
- **CONTROLS:** External test switch and pilot light supplied.
- **POWER REQUIREMENTS:** 120/277 VAC operation.

### battery

Maintenance-free sealed high temperature nickel cadmium.

### accessories


(Order as separate item) **Model**  
Remote test switch and pilot light . . . **PSW**  
(includes single gang chrome finished mounting plate)  
Wire End Caps for AM6 . . . . . **EC6**

### unit selection chart

Model No.	Lamps Operated In Emergency Mode	Emergency Illumination Time	Lumens	Wire End Caps	Warranty
AM6	1 lamp 2'-4' (20W-40W)	90 min.	550	Optional Order Model EC6	2 year full
AM9	1 lamp 2'-4' (20W-40W) or 1 lamp 5'-8' (45W-215W)	120 min. 90 min.	650	Included	3 year full
AM7	1 lamp 2'-8' (20W-215W) or 2 lamps 2'-4' (20W-40W)	90 min. 90 min.	900	Included	2 year full
AM11	1 compact fluorescent lamp (7,9 or 13W)	90 min.	650	Included	2 year full
AM12	1 lamp 2'-8' (20W-215W) or 2 lamps 2'-4' (20W-40W)	90 min. 90 min.	1100	Included	5 year full
AM18	1 compact fluorescent lamp (10,13,16,18 or 26W)	90 min.	850	Included	2 year full
AM10 (Meets NYC Code 2 footcandle requirement)	1 lamp 2'-8' (20W-215W) or 2 lamps 2'-4' (20W-40W)	90 min. 90 min.	1400	Included	2 year full
AM20	1 compact rapidstart (16-39W) 1 compact fluorescent	90 min.	650	Included	3 year full



AM 10

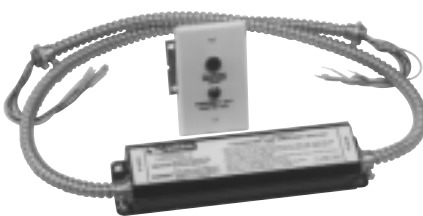

AM 18