

X10 Series X12 & X14 Steel Exit Series



The **X10 Series** is a rugged steel exit designed for ease of installation. It is a fully universal exit. The side panel is removable, allowing exit faces to be changed as required. The exit is fabricated from 20 gauge steel and is available with a off-white or black finish.

UL Listed

Exceeds UL Exit Visibility Requirement.

Light Sources

- Incandescent • LED

Sealed Maintenance-Free Batteries

- Nickel Cadmium • Long Life Lead • Lead Calcium



Standard Features

Reliability

The X10 Series comes complete with a 3-year full warranty.

Unit Data

X10 Series is constructed of rugged 20 gauge steel. Exits include two standard epoxy powder finishes to choose from off-white or black, Universal Mounting, Downlight, Single or Double face, stencil or open face and removable side panel are available.

PulsePlus Charger

PulsePlus circuitry offers 120/277 volt input 60 Hz (other inputs available), fused output circuit, dual diagnostic indicator lights, temperature compensation, sealed relay, low voltage battery disconnect, brownout protection and lockout (automatic battery connect).

Optional Features

Description

	Add Suffix
PulsePlus diagnostics (not available with nickel cadmium battery).....	PPD
Non-standard input voltage.....	Specify
277 volt dual circuit, (AC-only).....	277-2
120 volt dual circuit, (AC-only).....	120-2
Flasher (AC/DC and self-powered exit only).....	FL
Flasher buzzer combination, (AC/DC and self-powered exit only).....	FZ
Fire alarm activated flasher, (AC exit only).....	FAC
Fire alarm activated flasher, (Self-Powered Exit Only).....	FA
Tamperproof.....	TP
Brushed aluminum face.....	BAF

Accessories (order as a separate item)

12" white pendant.....	P12WT
12' black pendant.....	P12BK
Wire guard ceiling mount, (exit housing only).....	WG5
Wire guard end mount, (exit housing only).....	WG5
Wire guard for wall mount (AC-only, AC/DC, and SNX exit signs).....	WG12
Wire guard for wall mount (mini system & combo units).....	WG6

Choice of Models

AC & AC/DC Models: (Specify 120 or 277 Voltage)

Incandescent: include two 12 watt lamps for 120 or 277VAC operation.

Self-Powered Models: (120/277 Dual Voltage)

Incandescent: include two 12 watt lamps for normal AC operation and three battery powered DC lamps for emergency operation.

LED: LED's operate in the normal and the emergency mode.

Mini Systems Models: (120/277 Dual Voltage)

Incandescent: exit lamp configuration same as self-powered models.

Remote capacity (SRX and STX models)

No EF9 mounted heads = 18 watts remote capacity

Two EF9 mounted heads = 6 watts remote capacity

LED: exit lamp configuration same as self-powered models.


Remote capacity (SRX and STX models)

No EF9 mounted heads = 21 watts remote capacity

Two EF9 mounted heads = 9 watts remote capacity

Outline and Dimensions

Dimensions are approximate and subject to change.

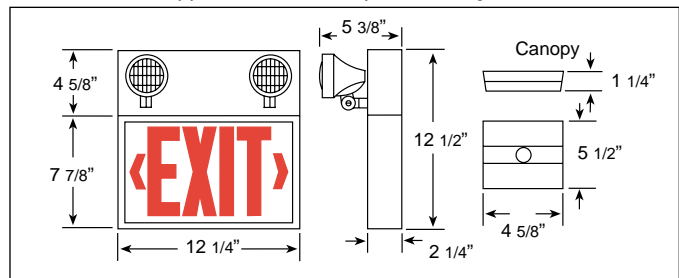

How To Order MODEL EXAMPLE:

		W	SRX	12	R	29	TP	
AC/DC Models	AC Lamp	Housing Color	Sealed Battery	Series	Face	AC-Only Models	Mini Systems #of heads	Option Suffix
DC Lamp			Blank=AC-only		Stencil Face	Voltage Input		See chart
Blank=AC-only	Blank=	W=White B=Black	(Self-Powered Models)*	14=Universal; Double face, with canopy and backplate	R=Red G=Green Open face	120=120VAC 277=277VAC	19=1 EF9 head 29=2 EF9 heads Blank=0 heads	
6=6VDC	Incandescent AC & emergency mode		SMX=Lead calcium SEX=Long life lead SNX=Nickel cadmium (Combo mini system models)**		RW=Red/white WR=White/red GW=Green/white WG=White/green			
12=12VDC	L=LED		SRX=Long life lead STX=Nickel cadmium					
24=24VDC								
32=32VDC								
							Mini System Head Mounting:	
							0 Heads	1 Head
								2 Head

*Self-powered models do not offer remote capacity.

**Refer to choice of models for available remote capacity.