

CELC

EDGE-LIT COMBINATION EXIT AND EMERGENCY LIGHT

FEATURES

- Superior panel illumination with 6" Red or Green letters
- LED life-cycle exceeding 10 years
- Battery re-charge within 24 hours
- Damp location listed 10°C to 40°C (50°F to 104°F)
- Dual-voltage 120 or 277V AC, 60 Hz. input
- Includes long-life Nickel Metal Hydride battery for UL recognized 90 minute emergency lighting
- Pre-installed directional arrow indicator with template
- Provided with test switch and AC-On indicator
- Canopy included for surface mount model
- Matching CELEM Recessed emergency light



SPECIFICATIONS

CONSTRUCTION

- The acrylic panels are ultrasonically welded and taped at the edges to maximize illumination and Exit visibility
- Double-face with mirror divider, and single-face in clear
- The housing finish and trim-plate is brushed aluminum
- Recessed mount model comes with a fully recessed box complete with integrated caddy-bar assembly


INSTALLATION

- Exit plaque can be oriented for wall or ceiling mount at install
- The CELC Series can be applied in surface or recessed mounting options
- Lamp heads are adjustable for wall or ceiling mount
- The CELC is provided with a steel back-box complete with adjustable caddy-bar assembly

ELECTRICAL

- Long-life Nickel Metal Hydride battery
- Emergency illumination provided by a single high-power LED with 125 lumens per lamp
- The emergency light is designed to provide UL924 compliant emergency lighting for the full 90 minutes

tradeSELECT®

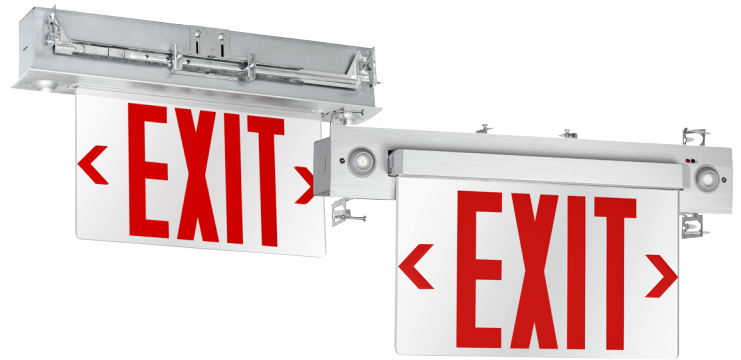

RELATED PRODUCTS

[CELEM Recessed Emergency Light](#)

CERTIFICATIONS

- UL924 Listed for Damp Location
- NFPA 101
- NFPA 70
- OSHA
- CEC T20 Compliant

WARRANTY

- 2 year full unit warranty
- See [HLI Standard Warranty](#) for additional information

ORDERING GUIDE

Catalog Number	Description
CELCR1RN	Recessed mounting, Single Face, Red Letters, Brushed Aluminum
CELCR2RN	Recessed mounting, Double Face, Red Letters, Brushed Aluminum
CELCR1GN	Recessed mounting, Single Face, Green Letters, Brushed Aluminum
CELCR2GN	Recessed mounting, Double Face, Green Letters, Brushed Aluminum
CELCS1RN	Surface mounting, Single Face, Red Letters, Brushed Aluminum
CELCS2RN	Surface mounting, Double Face, Red Letters, Brushed Aluminum
CELCS1GN	Surface mounting, Single Face, Green Letters, Brushed Aluminum
CELCS2GN	Surface mounting, Double Face, Green Letters, Brushed Aluminum

ENERGY CONSUMPTION

	120VAC		277VAC	
	Watts	Amps	Watts	Amps
CELCR	3.9W	32mA	4.9W	18mA
CELCS	3.9W	32mA	4.9W	18mA


CELC

EDGE-LIT COMBINATION EXIT AND EMERGENCY LIGHT

MATCHING ACCESSORIES - CELC COMBINATION EDGE-LIT EXIT EMERGENCY LIGHT

Catalog Number	Description
CELEM	Recessed mounting Emergency light, 250 lm
CELEMHO	Recessed mounting Emergency light, 400 lm

APPLICATION INFORMATION

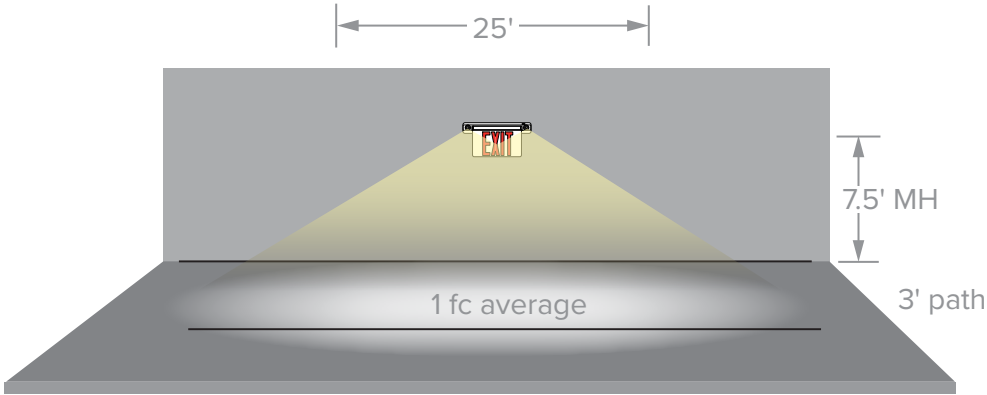

DIMENSIONS

