



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Thermoplastic emergency light with two high-efficiency 5W LED lamps
- Designed for ceiling or wall mounting
- Fast, easy installation
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing
- Designed for fast installation

LAMP

- Utilizes two high-efficiency 5W LED heads in emergency mode with a total lumen output of 1100lm

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Nickel-cadmium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10° C - 40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

EU-5-LED

HIGH-OUTPUT L.E.D. EMERGENCY LIGHT



DIMENSIONS

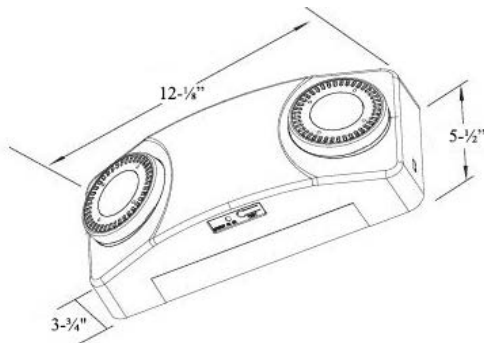

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Ceiling / Wall	Nickel-cadmium	UL 924	12.125" W X 5.5" H

ORDERING GUIDE

MODEL	HOUSING FINISH	OPTIONS
EU-5-LED High-Output Emergency Light	B Black W White	SD Self Diagnostics