

Genesis[™] 'Over The Door & Floor Proximity' Tandem Series

Single and double face, surface and recessed* mount edge-lit exit sign



Construction

- DX, DXN 'Over the door' exit faceplate, backplate and canopy are made of die-cast aluminum
- DX, DXN offers 6 inch EXIT lettering legend, available in red or green
- LL "Floor Proximity" exit faceplate is made of die-cast aluminum; backbox is made of steel
- LL offers 6 inch EXIT lettering legend, available in red or green
- Choice of finishes: white, black or brushed aluminum
- Universal field selectable chevrons

Mounting

- GXM, GXEM surface mount only
- Canopy included for ceiling mount applications
- Backplate features universal knockouts for a standard
 4 inch junction box, used in wall mount applications
- FPGXLD surface mount or recessed mount
- Single face model only

Special Wording Panel

Not available

Electronics

- Standard Improved Diagnostics on GXEM
- Optional Nexus® monitoring system
- 120-277 60Hz

Approvals

- CSA-US (To UL 924 standards)
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards

Warranty (subject to proper installation and maintenance)

Five-year limited warranty

Detailed warranty terms located on page 197 or online at: www.lightalarms.com





Power consumption chart

| Model | | AC Specs | DC Specs |
|-------|--------------|--------------------------------------|--|
| | AC-Only | 120/277VAC, 60Hz (1.5W) | - |
| Red | AC-2 Circuit | 120/120VAC & 277/277VAC, 60Hz (2.6W) | - |
| | Self-powered | 120/277VAC, 60Hz (3.8W) | Nickel-Cadnium battery (Min. 90 minutes) |
| | AC-Only | 120/277VAC, 60Hz (0.9W) | - |
| Green | AC-2 Circuit | 120/120VAC & 277/277VAC, 60Hz (3.3W) | - |
| | Self-powered | 120/277VAC, 60Hz (5W) | Nickel-Cadnium battery (Min. 90 minutes) |

Accessories (Order as a separate item)

| Description | Product code |
|-------------|--------------|
| Wire Guard | WG11-L |

Frame/Face plate color








Brushed aluminum

Black

White




Dimensions (Dimensions are approximate and subject to change):

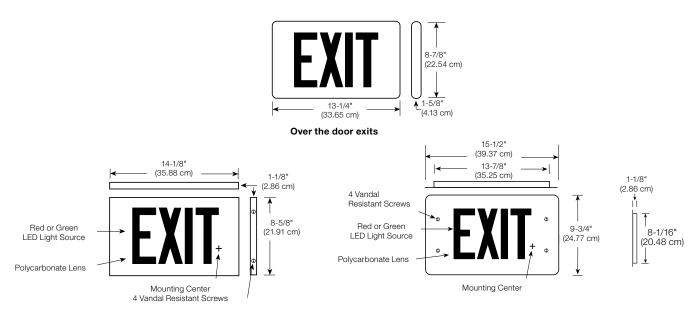

Floor proximity surface mount exits

Floor proximity recessed mount exits

How to order typical applications (Must be ordered as a Tandem, over the door with a floor proximity Exit sign):

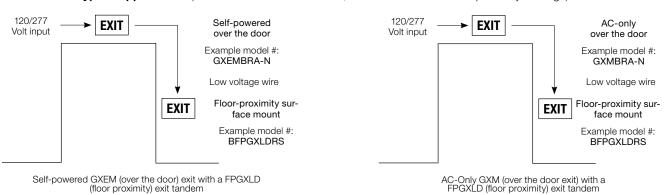

Ordering format (Must order 'Over the Door' GX or GXM Exit sign and a "Floor Proximity" FP-GL exit sign as a tandem)

Over the door exit sign

| Series | Frame color | Legend color | Face plate color | Version | Option |
|--|--|---------------------|---|---------|--|
| GXM = AC-Only or 2 circuit model GXEM = Self-powered | A= Brushed Aluminum BodyB= Black BodyW= White Body | R= Red G = Green | A= Brushed AluminumB= BlackW= White | -N | -2 = 2 circuit (120/120 or 277/277) (For use with GXM Series) |
| Example: GXEMBRA-N | | | | | |

Floor proximity exit sign

| Frame color | Series | Legend color | Trim | Option |
|--|------------------------------|------------------------------------|---------------------------------------|---|
| A= Brushed aluminum body B= Black body W= White body | FPGXLD= Floor Proximity Exit | R = Red G = Green | R= Recessed mount S= Surface mount | LVR = Vandal resistant polycarbonate lens and screws |
| Example: AFPGXLDRR | | | | |