

LP2H

Steel Exit & Emergency Combo

DATE:

PROJECT

COMMENTS:

FEATURES

- PAR 18 style thermoplastic heads
- Attractive, contemporary steel housing design
- Universal face available
- Energy efficient high output LEDs
- Sealed External Momentary test switch and dual diagnostic LED indicator display
- AC presence and Hi-Charge status
- Maintenance-free, sealed nickel cadmium batteries provide at least 90 minutes of emergency run-time
- Line latch prevents unnecessary discharge of battery during installation — loads will not illuminate until after application of utility power
- Short circuit battery protection
- Brownout detection ensures emergency operation during periods of low line voltage
- 120/277 VAC field selectable inputs (with the exception of the TD (Time Delay) option which requires voltage specification upon ordering)
- BAA Compliant



ORDERING INFORMATION *LP2H-LC-12V27W-G-2-WH-MB-2-BRH-L65*

1. SERIES	2. OPERATION TYPE	3. OPERATION	4. ILLUMINATION	5. FACE COUNT	6. FRAME COLOR	
LP2H	-	-	-	-	-	
	LC Lead Calcium Battery Backup	6V12W 6 Volts, 12 Watts 6V18W 6 Volts, 18 Watts 6V27W 6 Volts, 27 Watts	6V36W 6 Volts, 36 Watts 12V27W 12 Volts, 27 Watts 12V36W 12 Volts, 36 Watts	G Green R Red	1 Single 2 Double U Universal	WH White BK Black
	NC Ni-Cad Battery Backup	6V22W 6 Volts, 22 Watts 6V42W 6 Volts, 42 Watts	12V42W 12 Volts, 42 Watts			
7. MOUNTING	8. HEAD COUNT	9. HEAD STYLE	10. LAMP SOURCE	11. OPTIONS		
MTEB Top/End/Back Mount MPAB 12" Swivel Mount (Black) MPABA 12" Swivel Mount (Brushed Aluminum) MPAW 12" Swivel Mount (White)	0 Zero Lamps 1 One Lamp 2 Two Lamps	BRH BRH Lamp Heads LRH LRH Lamp Heads XRH XRH Lamp Heads	See Lamp Chart for Part # Example: Halogen Single Head 12V 12W = "H1212"	BLANK = NO OPTION SD Self-Diagnostics AA Audible Alarm (Buzzer) FL Flasher FA Fire Alarm Interface TD1 Time Delay - 120 VAC (15 min.) TD2 Time Delay - 277 VAC (15 min.)		

ACCESSORIES; ORDER SEPARATELY

- WG 1 = Wire guard 17.0" X 17.0" X 17.0"
- WG 10 = Wire guard 13.5" X 12.0" X 16.5"

CONSTRUCTION

- Durable, 20 gauge steel

LETTERS

- 6.0" height; 0.75" stroke

ARROWS

- NFPA-Type, universal field selectable chevrons

TEMPERATURE RATING

- From 50°F to 104°F


APPROVALS

- CSA-US listed
- NFPA 101 Life Safety Code
- NFPA 70 - NEC
- OSHA
- BAA Compliant

WARRANTY

Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

DIMENSIONS

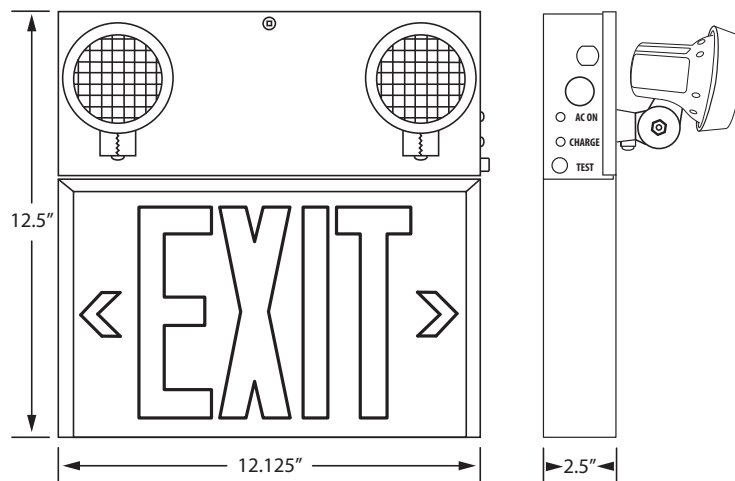

LAMP CHARTS

B - BI-PIN HALOGEN		
	6V	12V
8W	B68	B128
10W	B610	
12W	B612	B1212
20W	B620	B1220
35W		B1235

L - LED		
	6V	12V
2W		L122
5W	L65	L125
7W	L67	L127

M - MR16		
	6V	12V
20W		M1220
35W		M1235