



Project	
Notes	
Type	Date
Cat. No.	

LXS™ Series

Bi-Color LED Exit Sign



LXS Series
LXS-2-W-GR
LXS-2-B-GR

Limited Warranty 5-years

Quick Ship

LXS-2-W-GR
LXS-2-B-GR

APPLICATIONS

The LXS series is a compact low profile Exit sign that combines an attractive, easy-to-install; compact contemporary design with proven, ultra-reliable electronics to provide the very best in energy efficient emergency lighting. LXS units are completely self-contained, and feature universal mounting, canopy included. Ideal for application requiring attractive, quick-installation exit sign and low energy consumption.

Specification Features



Construction

Injection molded, engineering grade 5VA flame retardant, high impact resistant thermoplastic in white or black finish. Aesthetically pleasing, curved face, rounded corner indicators. EZ snap-out Chevron directional indicators.

Qualifications

Meets UL924, NFPA 11 life safety Code, NEC, OSHA Local and State Codes. UL listed for damp locations (0° C - 40° C).

Warranty

5-year Limited Warranty on all electronics and housing. Battery pro rated for 5 years.

Electrical

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 1.2V long-life, maintenance - free, rechargeable NiCad Battery. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharging a discharging battery.

Installation

Universal mounting pattern knock-out in back plate for J-Box mounting. EZ-Snap mounting canopy included for top or end mount.

Ordering Information

Example: LXS-2-W-GR

LXS	2	W	GR		
Series LXS LED Exit Sign	Faces 2	Housing B - Black W - White	Lettering GR- Green/Red	Battery AC - AC only EM- 90 minute battery	

Specifications and Dimensions subject to change without notice

Performance Summary

Input Voltage	120V/277V
Input Frequency	50/60 Hz
Rated Wattage	2W
Operating Temp.	0°C to 40°C
Rated Life	60,000 hours
L70	> 72,000 hours or > 45,000
Power Factor	> 0.9

CCT Adjustable Switch



Performance Data

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)
None		LXS-2-W-GR	2
		LXS-2-B-GR	2

NOTES:


- ¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- ² Typical color consistency. May vary or be changed.
- ³ Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.
- ⁴ LXS also has the option of Self Diagnostic and remote capable.



Specifications and Dimensions subject to change without notice

Product Dimensions

LXS

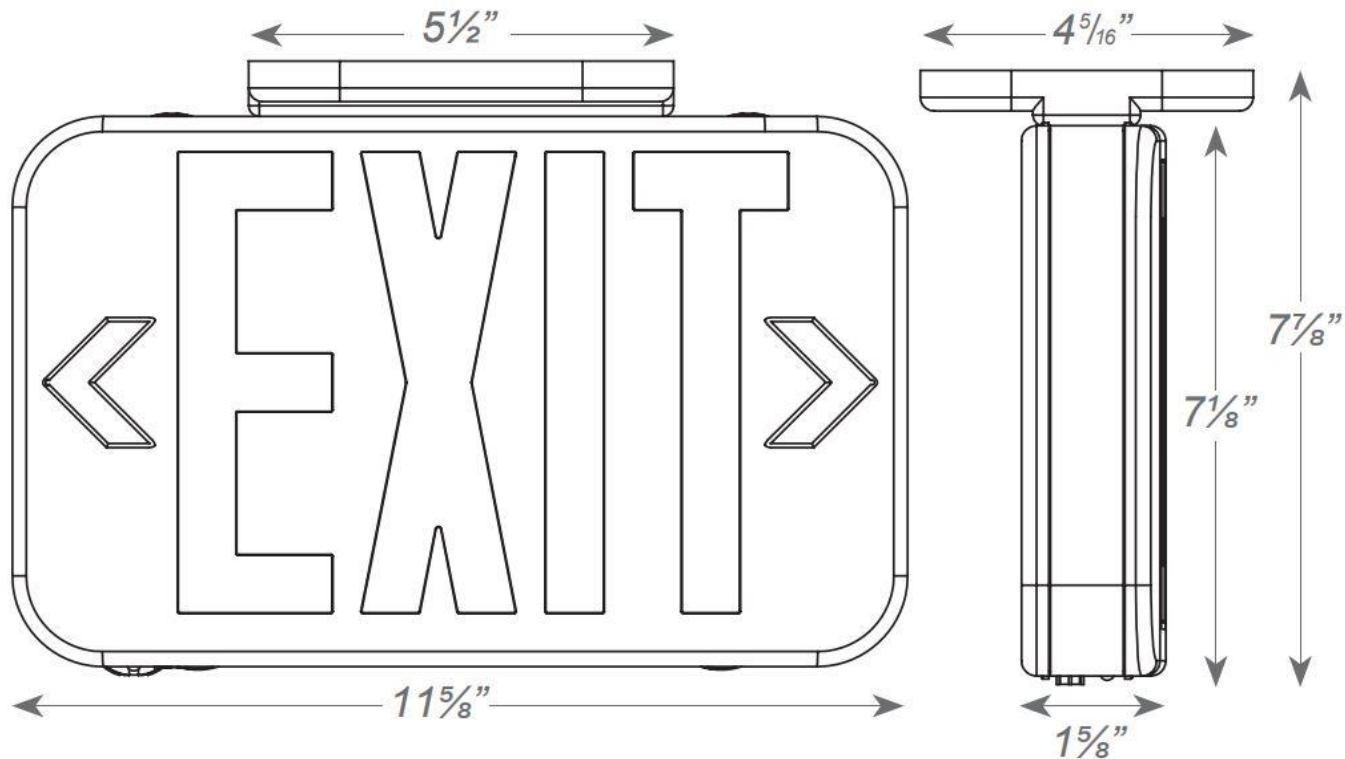

GlobalLux
LIGHTING

© 2019 GlobalLux Lighting, LLC. All rights reserved. For informational purposes only. Reproduction in whole or part is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use. GlobalLuxLighting reserves the rights make changes in specification at any time without notice.

GlobalLux Lighting LLC
www.globaluxlighting.com
2037 S. Vineyard Ave
Ontario, CA 91761
Ph: 909-591-7506