

## Remote Fixture Phantom™ Series

Virtually invisible, architecturally pleasing



### Description

- Indoor use
- One-piece all-metal module design
- Complete 360° door rotation
- Slip gear mechanism protects the unit from objects that would cause the door rotation to be forcibly stopped.

### Finish

- Flat door and frame are covered with a high-quality, powder coated textured mist white finish
- Surface finish can be customized on site with paint, wallpaper or other coverings.

### Mounting

- The module includes the electrical junction box and is installed on the wall stud or ceiling beam with the help of a simple, U-shape bracket.
- Key-hole slot for ease of installation

### Lamp type

Choice of MR16 LED lamp voltages and wattages

### Approval

- CSA-US (to UL 924 standards)
- New York City Approved


**Warranty** (subject to proper installation and maintenance)

Unit: five-year full warranty

Detailed warranty terms located on page 197 or online at: [www.lightalarms.com](http://www.lightalarms.com)




**Dimensions** (Dimensions are approximate and subject to change)

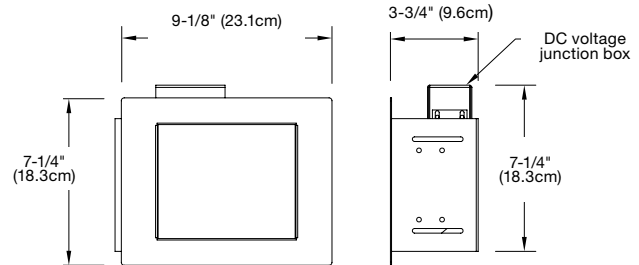

### Photometric performance

Lamp	Spacing center-to-center (feet)	
	7 feet mounting height	15 feet mounting height
LD7	39'	34'
LD9	49'	39'
LD10	68'	54'
LD13	89'	80'

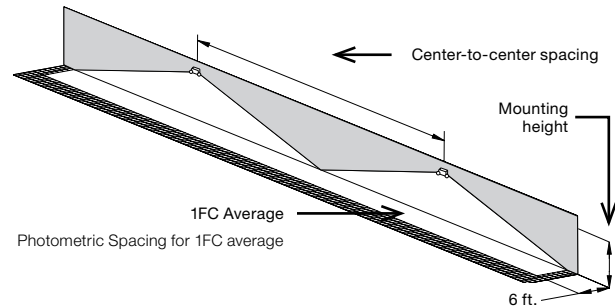

### Lamp selection chart – MR16 LED lamps

Lamp suffix	Voltage	Wattage	Lumens	Replacement #
LD7	12	4	170	580.0093-L
LD9	12	5	340	580.0101-L
LD10	12	6	540	580.0106-L
LD13	24	4	200	580.0098-L

### Ordering format

Series	Lamp suffix	Options
12PMR2= 12 VDC <sup>1</sup>		DL= Lamp location
24PMR2= 24 VDC <sup>1</sup>	_____ <sup>2</sup>	
<b>Example: 12PM2R-LD10</b>		

<sup>1</sup> Double lamp remote fixture

<sup>2</sup> Choose from lamp selection chart