

# PRLEDCNYXTE

## New York City Approved LED Exit & Emergency Combo



<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

### STANDARD

- UL Listed
- NYC Approved

### ILLUMINATION

- Adjustable 1.5W square LED lampheads with long lasting & efficient ultra bright white LEDs.
- Field installable 3rd emergency lighting head included with the PRLEDCNYXTE-43 model.
- Knockouts provided on sides of unit to relocate lamp heads.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Ultra bright, energy efficient, long life Red LEDs.
- New York City compliant 8" EXIT letters.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capable standard.

### MOUNTING

- Knockouts on the back for wall mount.
- Mounting hardware provided for ceiling (2-head model) or end mount.
- Knockouts provided for conduit feed applications.


### HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Injection-molded, engineering grade, high-impact, thermoplastic heads.
- Field removable steel knockout chevron directional indicators on exit face.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

### DIMENSIONS

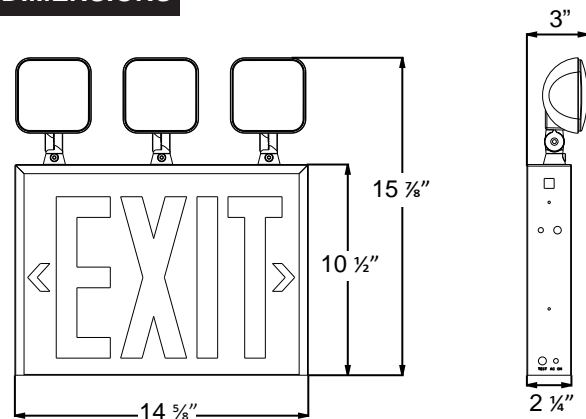

### ELECTRICAL INFORMATION

MODEL NUMBER	INPUT WATTS (W)		INPUT AMPS (A)		BATTERY	REMOTE CAPACITY
	120V	277V	120V	277V		
PRLEDCNYXTE	5.2	6.2	0.06	0.04	9.6V	1.5W-3W

### ORDERING INFORMATION

Sample Part Number: PRLEDCNYXTE1RW-42

#### NOTES:

<sup>1</sup> Using 1.5W LED remote heads.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	TOTAL NO. OF HEADS (INTEGRAL + REMOTE)	NO. OF INTEGRAL HEADS
PRLEDCNYXTE	3	R Red	W White	4 4 Heads	2 2 Heads 3 3 Heads