


LED EXIT & EMERGENCY LIGHTING | DIECAST LED EXIT SIGN



TECHNICAL SPECIFICATIONS:

- :: Dual 120/277 voltage
- :: Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- :: 2.4V long life, maintenance-free, rechargeable NiCd battery
- :: Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- :: Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

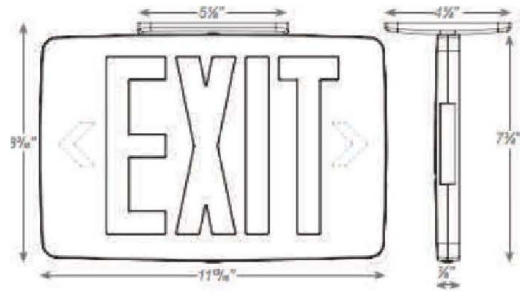

THIN DIECAST LED EXIT SIGN

CATALOG NO.	LETTERS	FACEPLATE	BODY	VOLTAGE	BATTERY
XD-TH-1GAAEM	Green	Single Face Aluminum	Aluminum	120/277	Battery backup
XD-TH-1GBBEM	Green	Single Face Black	Black	120/277	Battery backup
XD-TH-1GWWEM	Green	Single Face White	White	120/277	Battery backup
XD-TH-1RAAEM	Red	Single Face Aluminum	Aluminum	120/277	Battery backup
XD-TH-1RBBEM	Red	Single Face Black	Black	120/277	Battery backup
XD-TH-1RWWEM	Red	Single Face White	White	120/277	Battery backup
XD-TH-2GAAEM	Green	Double Face Aluminum	Aluminum	120/277	Battery backup
XD-TH-2GBBEM	Green	Double Face Black	Black	120/277	Battery backup
XD-TH-2GWWEM	Green	Double Face White	White	120/277	Battery backup
XD-TH-2RAAEM	Red	Double Face Aluminum	Aluminum	120/277	Battery backup
XD-TH-2RBBEM	Red	Double Face Black	Black	120/277	Battery backup
XD-TH-2RWWEM	Red	Double Face White	White	120/277	Battery backup

G10

DIECAST LED EXIT SIGN

