

Galaxy™ XLD & XLED Series

LED die-cast aluminum exit fully recessed mount AC, AC/DC or self-powered exit signs



Construction

- Die-cast aluminum faceplate
- 6 inch EXIT lettering legend available in red or green
- Field-selectable chevrons
- Choice of finishes: white, black or brushed aluminum

Mounting

Fully recessed mount


Electronics

- Standard Improved Diagnostics (self -powered models)
- 120/277 60Hz

Special Wording Panels

Available. Contact your sales representative with your design requirements

Dimensions (Dimensions are approximate and subject to change):

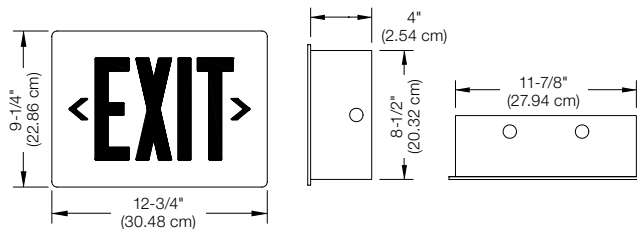

Approvals

- UL 924 Listed
- CSA US (to UL924 Standards)
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards
- E-California Energy Commission Title 20

Warranty

Five-year limited warranty


Detailed warranty terms located on [page 197](#) or online at: www.lightalarms.com



Power consumption chart

Model	AC Specs	DC Specs
AC	120VAC, 60Hz (Less than 1.4W)	—
AC/DC	277VAC, 60Hz (Less than 2W)	6VDC-48VDC (Less than 1.5W)
Self-Powered	120VAC, 60Hz (Less then 1.7W)	Ni-Cd battery (Min. 90 Minutes)

Face plate color

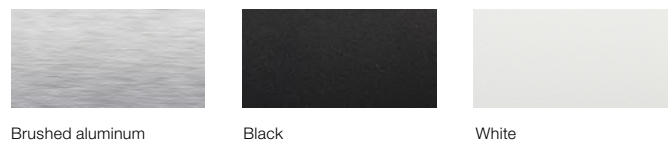

Ordering format

Model	Series	Legend/stencil color	Housing color	Options
R= Fully recessed mounting (single face only)	-XLD= AC, AC/DC -XLED= Self-Powered standard with self-diagnostic Ni-Cd battery	R= Red G= Green	A= Aluminum face W= White face B= Black face	-DL= Damp location -FB= Flasher buzzer (Self-Powered) -FAF= Fire alarm activated flasher (AC) -FAF= Fire alarm activated flasher (Self-Powered) -VR= Vandal resist screws -LVR= Vandal resist shield and screws -2= Dual circuit operation (AC only) -Y= Open face
Example: R-XLEDRW-N				-N= New design